

FACTSHEET SEMPERGREEN[®]

DRAINAGE TYPE 10C (10 MM)

MATERIAL

Drainage type 10C is a drainage sheet with dimpled cores made of recycled HDPE. The sheet is covered with a polypropylene filter fleece (100 gr/m²) bonded to the top side of the sheet, with an overlap of 10 cm on one side.

APPLICABILITY

Drainage type 10C can be applied on flat and slightly sloping surfaces up to 5 degrees, depending on the construction of the roof. There should be no ponding water on the roof.


DELIVERY AND INSTALLATION

This product is supplied on a roll of 2.0 to 12.5 meters or 2.0 to 15 meters.

Drainage type 10C must be installed with the white side facing up.

To protect the roofing material, we recommend placing a protective cover (300 gr/m²) underneath the drainage sheet.

PRODUCT PHOTO

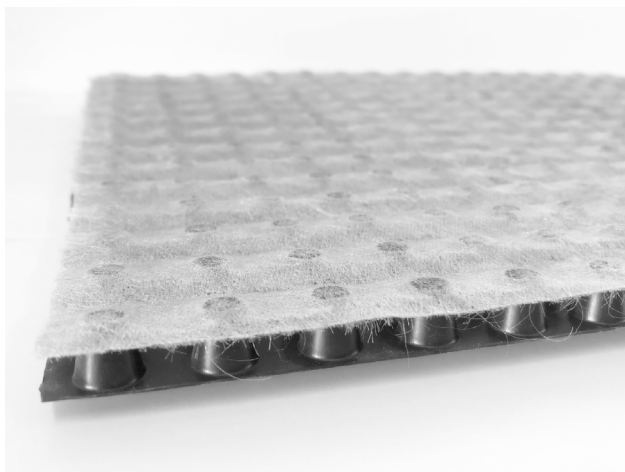

TECHNICAL DETAILS:

Weight:	700 gr/m ²
Thickness:	10 mm
Compressive strength:	ca. 420 kN/m ²
Size:	2.0 m x 12.5 m
Number of m ² per pallet:	150 m ²
or	
Size:	2.0 x 15 m
Number of m ² per pallet:	180 m ²

Naturally